

Professional grade 4K 8-channel HDMI video signal switcher

Model:CH8120K

Features


- 8 in 1 out digital audio and video HDMI switcher.
- Support resolution up to 3840 X 2160 30Hz, backward compatible.
- Support ARC CEC.
- The output supports fixed up/down frequency resolution: 1366 X 768/720P/1080P/4K30.
- Adjust input terminal EDID management via RS-232 command.
- The automatic scanning function can be turned on or off, and the automatic platform jumping function will be performed every 3 seconds after activation.
- The automatic signal detection function can be turned on or off, and after activation, it can automatically display the backward signal and the signal that is turned off.
- Support 0-second switching, no black screen trouble during the switching process, instant switching without delay, and smoother switching effect.
- Support sound separation and independent output.
- Backup duty and backup energy-saving modes.
- Control method: remote control, RS-232, button.

Specification

| | |
|------------------------------------|---|
| Model Name | CH8120K |
| Input | 8 x HDMI |
| Output | 1 x HDMI, 1 x 3.5mm |
| Support resolution | Input: 3840 x 2160 30Hz/1920 x 1080 60Hz/1280 x 720 60Hz/1366 x 768 60Hz. Each port can be set independently via RS-232 Output: 3840 x 2160 30Hz/1920 x 1080 60Hz/1280 x 720 60Hz/1366 x 768 60Hz. Can be set by buttons or remote control |
| Automatically scan | 3 seconds platform |
| Control method | Remote control, RS-232, button |
| The length of the connection cable | can be connected to a 28AWG HDMI cable up to 5 meters long, and the output + input cannot exceed 10 meters. If the length exceeds this length, it is recommended to use an extender to extend the distance. |
| Power supply | DC 12V 1A |
| Dimensions | 250 x 100 x 26mm (LxWxH) |
| Weight | 0.5Kg |

Diagram

Diagram

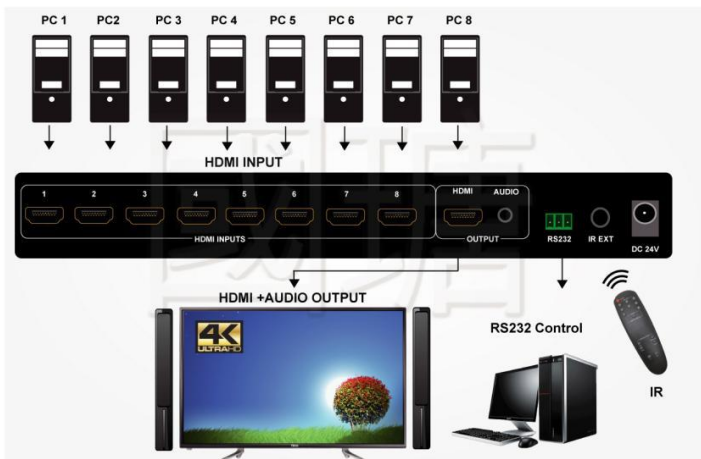

Package contents

- 1 X CH8120K
- 1 X DC 12V 1A Adapter
- 1 X Remote control (Battery not provided)
- 1 X User manual