

HDMI / USB2.0 Hub Extender

Model:CK2000


Features

- Transmit distance up to 50m over single Cat5e/6 cable.
- Support Full HD 1080P @60Hz, and bandwidth 1.65Gbps.
- Support USB2.0 pass through, E.g Touch screen or USB device.
- Support Dual POC. (RX powered by TX or TX powered by RX).
- Support PCM2.0, Audio sampling rate: 44KHz, 48KHz.

Specification

MODLE NAME	CK2000
Input	1 x HDMI, 1 x USB, 1 x RJ-45
Output	1 x HDMI, 2 x USB Keyboard Mouse output, 2 x USB2.0 Hub output, 1 x RJ-45
Video Resolution	DTV/HDTV: 480P/576P/720P/1080P VESA: 640x480, 800x600, 1024x768, 1280x1024, 1680x1050, 1280x720, 1360x768
Transmission Distance	50m(Max) over Single Cat5e/6 / 24AWG / Solid
USB Transmit Speed	480M bit/s (Max)
Material	Metal
Operating Temperature Range	-10 to 40°C (14 to 113°F)
Operating Humidity Range	5 to 90% RH
Power Supply	AC 110V-240V 50/60HZ DC 12V
Dimension (L x W x H)	84.2 x 75.2 x 27.5 mm (TX or RX)
Mass (Main unit)	257.5g (Tx or Rx)

Diagram

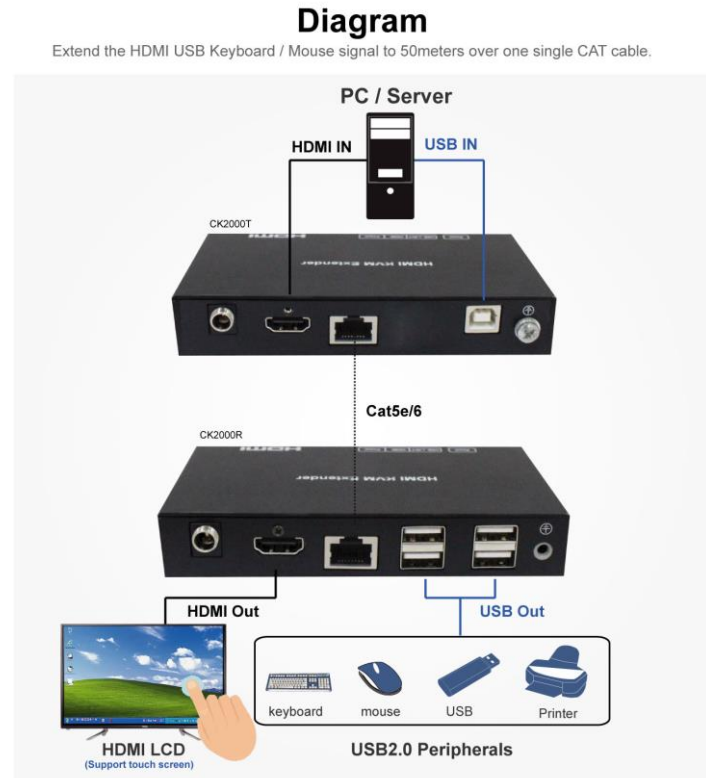

Package connects

- 1 x 12V Power Supply
- 1 x HDMI Cable
- 1 x USB2.0 Cable
- 1 x User Manual