

HDMI Wall-Plate Over IP Extender

Model: CW1200


Features

- HDMI Digital Audio / Video extended distance up to 120 meters between Transmitter and Receiver.
- Supports video high resolution up to 1920x1080, 1080P 60Hz.
- UTP/STP cable termination follows the standard of IEEE-568B.
- Comply with TCP/IP protocol, Streaming bit rate is 15Mbps.
- Following North American Wall plate standard.
- Support 3.5mm audio de-embedd function.
- Support one to one, one to many modes, with large cascade.
- Support LPCM audio format.
- Support HDCP Compliant.


Specification

Transmitter	1 x HDMI input, 1 x RJ-45 output
Receiver	1 x HDMI output, 1 x RJ-45 input, 1 x 3.5mm output
Protocol	H.264 encoder over TCP/IP
Video Resolution	480i / 480p / 576i / 576p / 720p / 1080i / 1080p @60HZ
Support Audio format	LPCM, Audio sampling rate 48KHZ
Streaming Bit Rate	15Mbps / 1080P
Dimension	TX: 70x115x40mm ; RX: 70x115x40mm
Weight	TX: 0.12KG ; RX:0.13KG
Power Consumption	TX: 4W RX: 3W
Power Supply	DC 5V 1A
Working Temp	-10 to +40 °C (+14 to +104°F)
Operating Humidity	20 to 90%RH (No Condensation)

Diagram

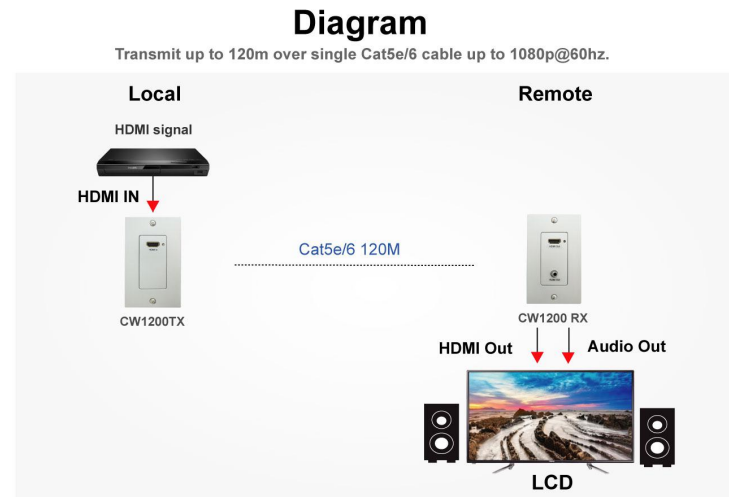

With Giga Switch Extend & Splitter

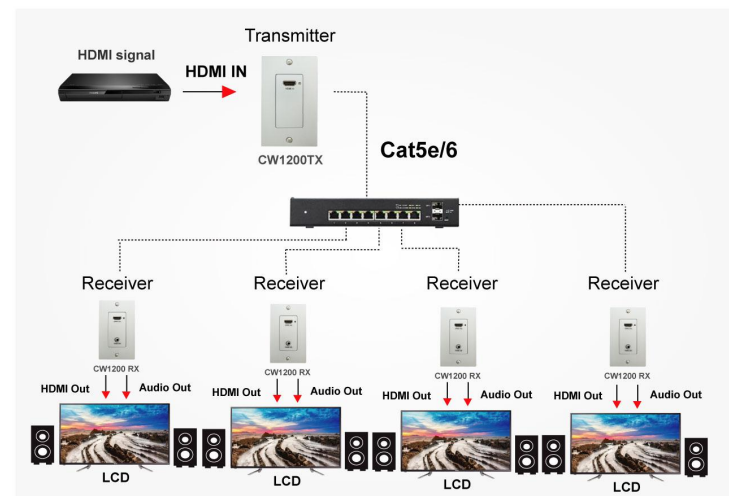

Package connects

- 2 x 5V 1A
- 6 x Screws
- 1 x User Manual