

MODEL **KF08**

8 Port Combo Free KVM Switch




PANIO Combo Free 8 port USB & PS/2 KVM switches feature the patented design of the availability of USB & PS/2 interface connection, user friendly OSD utility, Daisy chain function.

PS/2 USB VGA

Features

- ⌘ Controls 8 computers from a single console over PS/2 and/or USB connections.
- ⌘ Supports Windows, Linux, Mac OS9/OSX, Sun.
- ⌘ Built in OTG(On The Go) patent technology, each port operating independent, no delay.
- ⌘ Cascade Chain functions : up to 3 levels; control up to 64/256/4096 PCs.
- ⌘ Emulates keyboard on each PC to allow your computers to boot normally without keyboard error.
- ⌘ Supports Hot Plug.
- ⌘ Supports 3 types of port selection: OSD (On Screen Display), Push Button, Hot-Keys on PS/2 and/or USB of keyboard.
- ⌘ Supports Auto-Scan function.
- ⌘ Supports LED display for status monitoring.
- ⌘ Supports VGA resolutions up to 2048 x 1536 @ 85HZ.
- ⌘ Supports Beeper during Switching enabled.
- ⌘ Fully compliant with the USB 1.1/ 2.0 specification.

Diagram

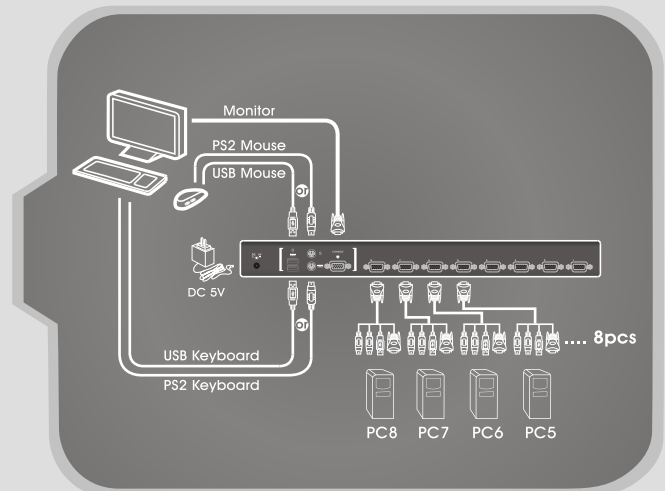

Specification

Model/Function		KF08
Port Selection		OSD/Hotkeys / Pushbutton
Console Ports	Video	1 x HDB-15 Female (Blue)
	Keyboard	1 x Mini Din-6 Female (Purple) ; 1 x USB TypeA Female (White)
	Mouse	1 x Mini Din-6 Female (Green) ; 1 x USB TypeA Female (White)
Computer Ports	Video	8 x HDB-15 Female (Black)
	Keyboard	
	Mouse	
Scan Interval		5~250 seconds
LEDs	On Line/ Selected	8 (Orange)
	Link	8 (Green)
Physical Properties	Housing	Metal
	Weight	1750g
	Dimensions (L x W x H)	44 x 15.7 x 4.5 cm
Environment	Operating Temp	0~50°C
	Storage Temp	-20~60°C
	Humidity	0~80% RH, Non-condensing

Accessories

- ⌘ 1 x KF08
- ⌘ 8 x Combo Custom 4-in-1 cable 1.8m (2 x PS/2 + USB + VGA)
- ⌘ 1 x Rack Mount Kits
- ⌘ 1 x DC 5V 2A Power adaptor
- ⌘ 1 x User's Manual