

MODEL **KF16**

16 Port Combo Free KVM Switch




PANIO Combo Free 16 port USB & PS/2 KVM switches feature the patented design of the availability of USB & PS/2 interface connection, user friendly OSD utility, Daisy chain function.



Features

- ⌘ Controls 16 computers from a single console over PS/2 and/or USB connections.
- ⌘ Supports Windows, Linux, Mac OS9/OSX, Sun.
- ⌘ Built in OTG(On The Go) patent technology, each port operating independent, no delay.
- ⌘ Cascade Chain functions : up to 3 levels; control up to 64/256/4096 PCs.
- ⌘ Emulates keyboard on each PC to allow your computers to boot normally without keyboard error.
- ⌘ Supports Hot Plug.
- ⌘ Supports 3 types of port selection: OSD (On Screen Display), Push Button, Hot-Keys on PS/2 and/or USB of keyboard.
- ⌘ Supports Auto-Scan function.
- ⌘ Supports LED display for status monitoring.
- ⌘ Supports VGA resolutions up to 2048 x 1536 @ 85HZ.
- ⌘ Supports Beeper during Switching enabled.
- ⌘ Fully compliant with the USB 1.1/ 2.0 specification.

Diagram

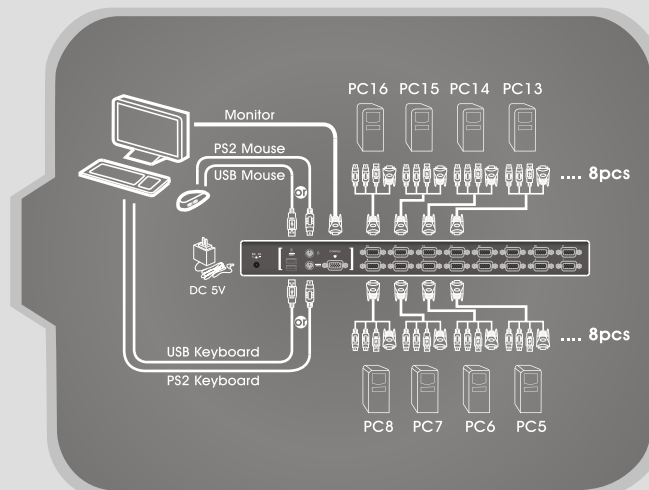

Specification

| | | |
|---------------------|--------------------------|---|
| Model/Function | | KF16 |
| Port Selection | | OSD/Hotkeys / Pushbutton |
| Console Ports | Video | 1 x HDB-15 Female (Blue) |
| | Keyboard | 1 x Mini Din-6 Female (Purple) ; 1 x USB TypeA Female (White) |
| | Mouse | 1 x Mini Din-6 Female (Green) ; 1 x USB TypeA Female (White) |
| Computer Ports | Video | 16 x HDB-15 Female (Black) |
| | Keyboard | |
| | Mouse | |
| Scan Interval | | 5~250 seconds |
| LEDs | On Line/ Selected | 16 (Orange) |
| | Link | 16 (Green) |
| Physical Properties | Housing | Metal |
| | Weight | 1900g |
| | Dimensions (L x W x H) | 44 x 15.7 x 4.5 cm |
| Environment | Operating Temp | 0~50°C |
| | Storage Temp | -20~60°C |
| | Humidity | 0~80% RH, Non-condensing |

Accessories

- ⌘ 1 x KF16
- ⌘ 16 x Combo Custom 4-in-1 cable 1.8m (2 x PS/2 + USB + VGA)
- ⌘ 1 x Rack Mount Kits
- ⌘ 1 x DC 5V 2A Power adaptor
- ⌘ 1 x User's Manual