

MODEL KH04D

4-Port DVI KVM switch with USB 2.0 HUB and Audio




PANIO 4 ports DVI KVM switch with USB 2.0 HUB and Audio supports DVI monitor with the resolution up to 1920 x 1200. This DVI KVM switch features USB & PS/2 Keyboard and mouse support, one 3 ports USB 2.0 HUB and Audio function KH04D allows you to control computers by pushing button, hot key and On-Screen-Display. With the powerful function, KH04D is the best DVI KVM switch to satisfy your demand of DVI connection.



Features

- ⌘ Controls 4 computers from a single console (keyboard/ mouse) over USB connection by using standard USB cables.
- ⌘ Supports PS/2 keyboard/mouse and USB keyboard/mouse.
- ⌘ Compliant with USB Specification Revision 2.0 and USB Device Class Definition for HID Revision 1.11.
- ⌘ Four computers can share two USB downstream ports.
- ⌘ Supports two types of switching:
 - a. Push button on front panel.
 - b. Hot keys on PS/2 and USB keyboard.
- ⌘ LED display for easy status monitoring.
- ⌘ Supply Microsoft Intellimouse 3 ~ 5 Key Mouse & Microsoft Natural Keyboard Pro series.
- ⌘ Supports DVI-I interface.
- ⌘ Supports DVI resolutions up to 1920 x 1200 @ 60HZ.
- ⌘ Supports Windows 98/98SE/2000/Me/Xp/VISTA, Linux, MAC OS9/OSX, SUNMICRO Solaris 8 or later.
- ⌘ Provides USB HUB switching in independent method or combination with the host switching (USB HUB Auto-Switch mode).
- ⌘ Provides audio switching in independent method.
- ⌘ Auto-Scan function (Time interval can be adjusted between 5-20 seconds when the Auto-Scan function is enabled).
- ⌘ Plug and Play (Windows 98/SE users might need your Windows CD to install the HID driver for USB keyboard/ mouse).
- ⌘ KVM firmware is upgradeable via on-board mini-USB download connector and external mini-programmer.

Diagram

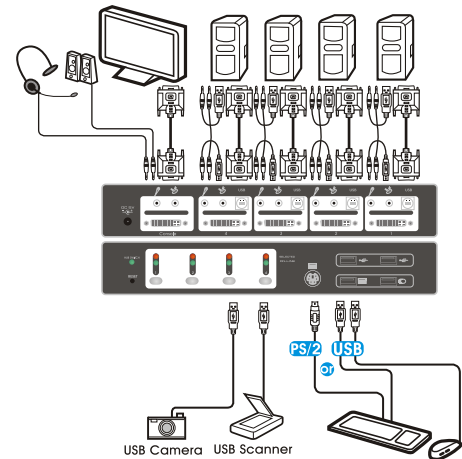

Specification

Model/Function	KH04D	
Selection Method	Push Button and Hot-Key (PS/2 and/or USB Keyboard)	
LEDs	Host Selected LED	(RED)
	HUB Selected LED	(Green)
	Auto Switch & Auto Scan LED	(Green)
Compliant with USB Version	USB1.0 / USB1.1 / USB2.0	
Compliant with HID Version	USB HID 1.11	
PC Connectors	Video	4 x DVI-I female
	USB	4 x USB Type B female
	Microphone	4 x Audio Jack Female (Pink)
	Speaker	4 x Audio Jack Female (Green)
Console Ports	Video	1 x DVI-I female
	USB	1 x PS/2 6 pin mini-DIN female
	Microphone	1 x Audio Jack Female (Pink)
	Speaker	1 x Audio Jack Female (Green)
USB Downstream ports	2 x USB Type A female	
Auto-Scan Interval	5,10,15,20 sec	
DDC, DDC2 DVI-I monitor	Yes(Max.Resolution:1920x1200 @60Hz)	
Operating systems supported	Win 98/98SE/ME/2000/XP/Vista, Mac OS9/X, Linux, Sun Micro OS	
Firmware upgrade connector	Mini USB female	
Dimensions (LxWxH)	280 x 91 x 54 mm	
Unit Weight	1018 g	

Accessories

- ⌘ 1 x KH04D
- ⌘ 4 x DVI cable (1.8M)
- ⌘ 4 x USB+Audio cable (1.8M)
- ⌘ 1 x DC 5V 1A Power adaptor