

Flexible Expansion Rack-Module 4K Extender Chassis

Model:GMS05


Features

- The HDBaseT transmitter card is centrally installed in a 2U chassis.
- GMS05_A: Using Cat5e/Cat6 cables, the transmission distance is 100m at 1080P resolution, and 70m at 4K 30Hz.
- GMS05_B: Using Cat5e/Cat6 cables, the transmission distance is 70m at 1080P resolution, and 35m at 4K 30Hz.
- The HD2710K-R can be used for the remote receiver.
- The chassis can install up to 14 pieces of transmitting cards.
- Support redundant power supply.
- Support transmitter POC power supply to receiver.
- Supports RS232 and EDID management.
- Support HDMI1.4b/ HDCP1.4.
- Hardware design, plug and play, without installing additional software.

Specification

Model Name	GMS05
Transmitter	1 x HDMI input, 1 x HDBT (RJ45) output, 1 x RS-232
Receiver	Used with HD2710K receiver
Slot	Up to 14 transmitting cards
Video resolution	4K 30Hz, 1080P 60Hz
Transmission distance (GMS05_A)	Up to 100 meters under 1080P, and up to 70 meters under 4K 30Hz.
Transmission distance (GMS05_B)	Up to 70 meters under 1080P, and up to 35 meters under 4K 30Hz.
Power Consumption	150W
Power Supply	AC 110 ~ 230V (POC power supply)
Dimensions	482 x 240 x 94mm (LxWxH)
Item Weight	2.5Kg

Diagram

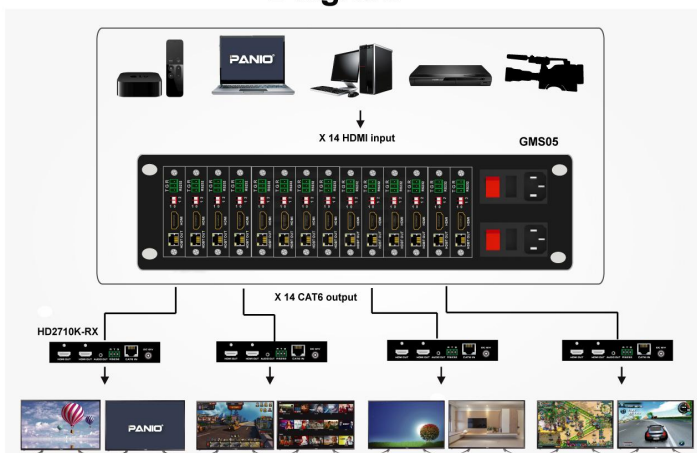

Package contents

- 1 X GMS05
- 2 X AC power cord
- 1 X User manual