


6-ports output video wall splicing processor

Model:HW61

Features

- Built-in 2x3, 3x2, 1x6, 6x1, 1x5, 5x1, Up to 6 screens, vertical or horizontal TV wall.
- Support 1 port DP, and 1 port HDMI switch input.
- The DP port support 2x3 mode 5760x2160 30HZ input, 3x2 mode 3840x2160 30HZ input.
- Supports custom resolution function, ultra-high resolution display, and the screen ratio will not be deformed or stretched.
- Support single screen 180° rotation function.
- Support screen mirroring function.
- Support 3.5mm port audio separation output.
- Pure hardware design, plug, and play, no need to install additional software.
- It has advanced functions such as 3D comb filter image decoding, 3D noise reduction and automatic motion compensation de-interlacing technology, skin color correction, color vividness enhancement, GAMMA correction and frame rate conversion.
- Support multiple output resolution options, compatible with LCD screens and projectors.
- Support leading image processing technologies and functions such as dynamic contrast enhancement, true six-axis color control overlay, and noise elimination.
- Control method: Remote control switch, panel buttons, RS-232.

Diagram

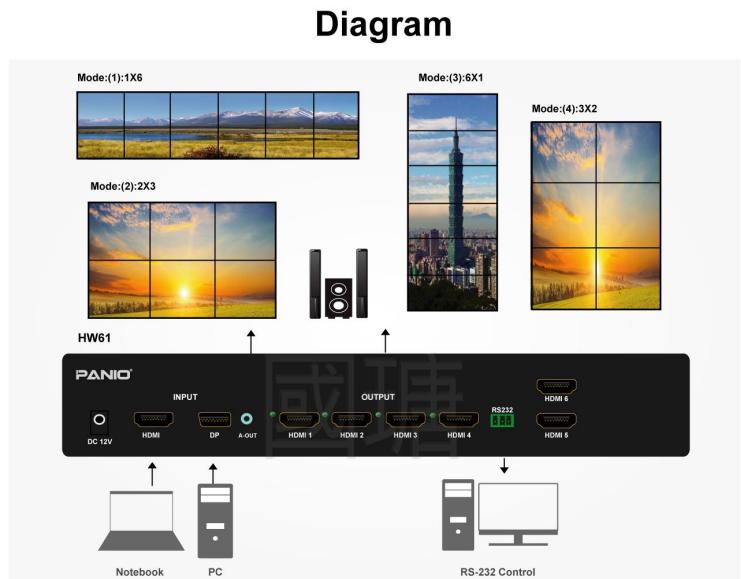

Diagram

Specification

Model Name HW61

Input	1 x HDMI, 1 x DP
Output	6 x HDMI, 1 x 3.5mm
Input resolution	DP input: 5760 x 3240 30Hz, 5760 x 1080 60Hz, 1920 x 3240 60Hz backward compatible HDMI input: 3840 x 2160 30Hz, 1920 x 3240 30Hz backward compatible
Output resolution	1024 x 768 60Hz, 1280 x 800 60Hz, 1280 x 720 60Hz, 1920 x 1080 60Hz, 1920 x 1200 60Hz resolution switchable
Splicing mode	1x2/3/4/5/6, 2x1/2/3, 3x1/2, 4x1, 5x1, 6x1, Screen placement vertical or horizontal.
Cable length	Input and output can be connected to a maximum of 5 meters 4K HDMI cable
Control method	Remote control, RS-232, Button
Power	DC 12V 1A
Dimensions	302 x 152 x 40mm (LxWxH)

Package contents

- 1 X HW61
- 1 X DC 12V 1A Adapter
- 1 X Remote control (Battery not provided)
- 1 X User manual