

15Amp 115V



Meter True RMS Current Meter.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Event Alert Email, Trap

Option Device Temp./Humidity Probe

General

Output	(10) NEMA 5-15/20R
Input	(2) IEC320 C20 Inlet; Enclosed C19 to NEMA5-15P plugs 3 Meters

Communication


SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	15 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius d
Humidity	
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

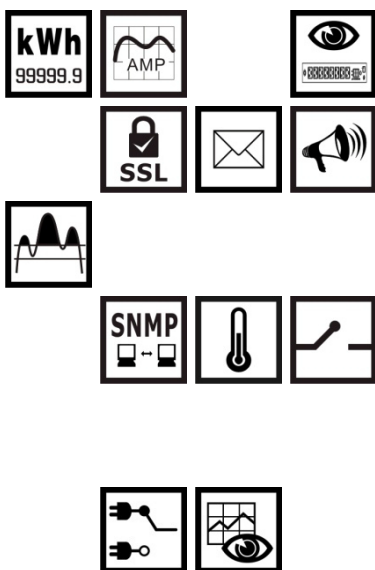

30Amp 115V



Meter True RMS Current Meter.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Event Alert Email, Trap

Option Device Temp./Humidity Probe

Protection Circuit Breaker

General

Output	(10) NEMA 5-15/20R
Input	(2) attached NEMA L5-30 plugs, 3 meters
Output Protection	(2) 20 AMP Circuit Breaker

Communication


SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7 kg

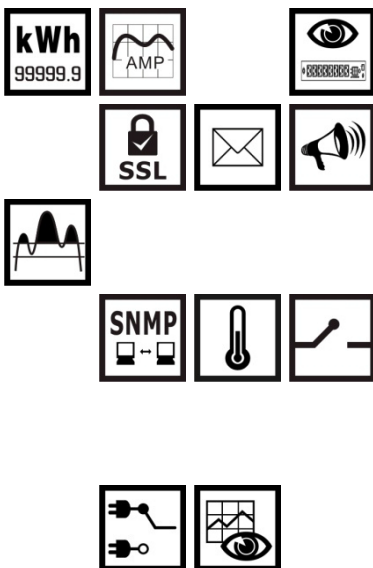

30Amp 115V



Meter True RMS Current Meter.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Event Alert Email, Trap

Option Device Temp./Humidity Probe

General

Output	(1) Terminal Block
Input	(2) Terminal Block

Communication

SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information


Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003

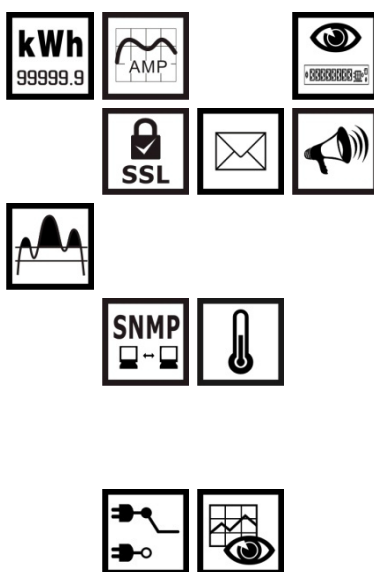

30Amp 208V



Meter True RMS Current Meter.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Event Alert Email, Trap

Option Device Temp./Humidity Probe

Protection Circuit Breaker

General

Output	(10) IEC320 C13
Input	(2) attached NEMA L6-30 plugs, 3 meters
Output Protection	(2) 20 AMP Circuit Breaker

Communication


SSL Indication	(1) Yellow LED
DHCP Indication	(1) Green LED
Output Status	(2) Green LED
Input Status	(2) Green LED
Network	(1) RJ45 for Ethernet
Temp./Humidity	(1) RJ11 for ENV probe connection
Identification	1 Digits Seven Segments for Identification
Meter	3 Digits Seven Segments

Power Information

Voltage	+/- 2% @ 90V~260V
Active Power	+/- 2% @ 50W~5000W
Apparent Power	+/- 2% @ 50VA~5000VA
Frequency	+/- 2% @ 45~65Hz
Power Factor	+/- 0.02 @ 0.5~1.0
kWh	Range: 0.001kWh ~ 99999.999kWh Precision: +/-2% @ 50W~5000W, kh=1.0
Current	Range: 0A ~ 32 A Resolution: 0.1A Precision: +/-2%/+/-0.1AMP

Operation

Nominal Voltage	200V/208V
On-Line Voltage	180V~ 262V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7 kg

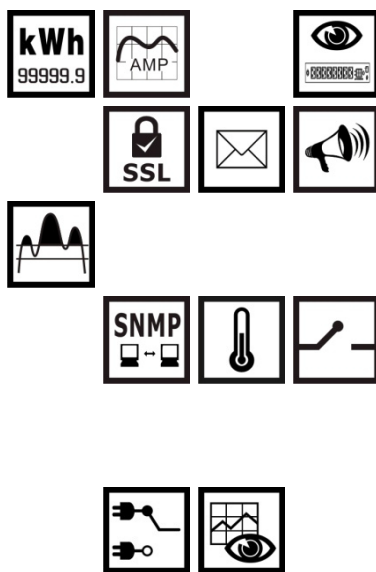

32Amp 230V



Meter True RMS Current Meter.

Power Monitor Total Power Monitoring by Meter, Web, SNMP, Free Bundle Software

Protocols Http, Https, SNMP, DHCP, UDP, SSL(verified by IE8 on WinXP)

Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Event Alert Email, Trap

Option Device Temp./Humidity Probe

General

Output (1) Terminal Block
Input (2) Terminal Block

Communication

SSL Indication (1) Yellow LED
DHCP Indication (1) Green LED
Output Status (2) Green LED
Input Status (2) Green LED
Network (1) RJ45 for Ethernet
Temp./Humidity (1) RJ11 for ENV probe connection
Identification 1 Digits Seven Segments for Identification
Meter 3 Digits Seven Segments

Power Information

Voltage +/- 2% @ 90V~260V
Active Power +/- 2% @ 50W~5000W
Apparent Power +/- 2% @ 50VA~5000VA
Frequency +/- 2% @ 45~65Hz
Power Factor +/- 0.02 @ 0.5~1.0
kWh Range: 0.001kWh ~ 99999.999kWh
Precision: +/-2% @ 50W~5000W, kh=1.0
Current Range: 0A ~ 32 A
Resolution: 0.1A
Precision: +/-2%/+/-0.1AMP


Operation

Nominal Voltage 200V ~240V
On-Line Voltage 180V~ 262V
Frequency 50/60Hz
Max. Output Current 32 Amp
Transfer Time 8~16ms
Operation Temp. 0 ~ 40 Celsius degree
Humidity 0% ~ 90%
Size 260 x 432 x 44.45 mm
Net Weight 5 kg

Regulatory Approvals



CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003

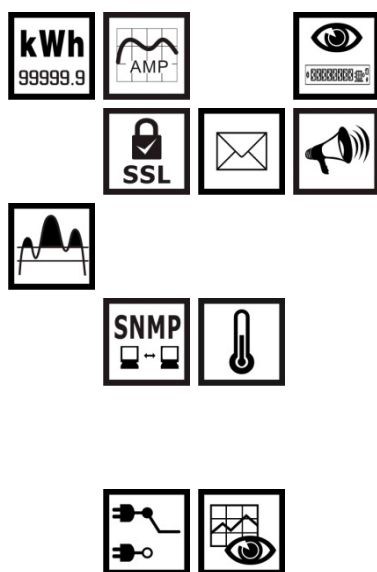

15Amp 115V



Installed in Rack Horizontal

Power Action Automatic Transfer Switch

General

Output	(10) NEMA 5-15/20R
Input	(2) IEC320 C20 Inlet; Enclosed C19 to NEMA5-15P plugs 3 Meters

Communication

Output Status	(2) Green LED
Input Status	(2) Green LED

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	15 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003



30Amp 115V



Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Protection Circuit Breaker

General

Output	(10) NEMA 5-15/20R
Input	(2) attached NEMA L5-30 plugs, 3 meters
Output Protection	(2) 20 AMP Circuit Breaker

Communication

Output Status	(2) Green LED
Input Status	(2) Green LED

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003



15Amp 115V



Installed in Rack Horizontal

Power Action Automatic Transfer Switch

General

Output	(10) NEMA 5-15/20R
Input	(2) IEC320 C20 Inlet; Enclosed C19 to NEMA5-15P plugs 3 Meters

Communication

Output Status	(2) Green LED
Input Status	(2) Green LED

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	15 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003



30Amp 115V



Installed in Rack Horizontal

Power Action Automatic Transfer Switch

Protection Circuit Breaker

General

Output	(10) NEMA 5-15/20R
Input	(2) attached NEMA L5-30 plugs, 3 meters
Output Protection	(2) 20 AMP Circuit Breaker

Communication

Output Status	(2) Green LED
Input Status	(2) Green LED

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	7 kg

Regulatory Approvals

CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003





30Amp 115V



Installed in Rack Horizontal

Power Action Automatic Transfer Switch

General

Output	(1) Terminal Block
Input	(2) Terminal Block

Communication

Output Status	(2) Green LED
Input Status	(2) Green LED

Operation

Nominal Voltage	110V ~130V
On-Line Voltage	100V~ 143V
Frequency	50/60Hz
Max. Output Current	30 Amp
Transfer Time	8~16ms
Operation Temp.	0 ~ 40 Celsius degree
Humidity	0% ~ 90%
Size	260 x 432 x 44.45 mm
Net Weight	5 kg

Regulatory Approvals CE, EN 55022 Class A, EN 55024, EN 61000-3-2, EN 61000-3-3
FCC Part 15 Class A, ICES-003

